



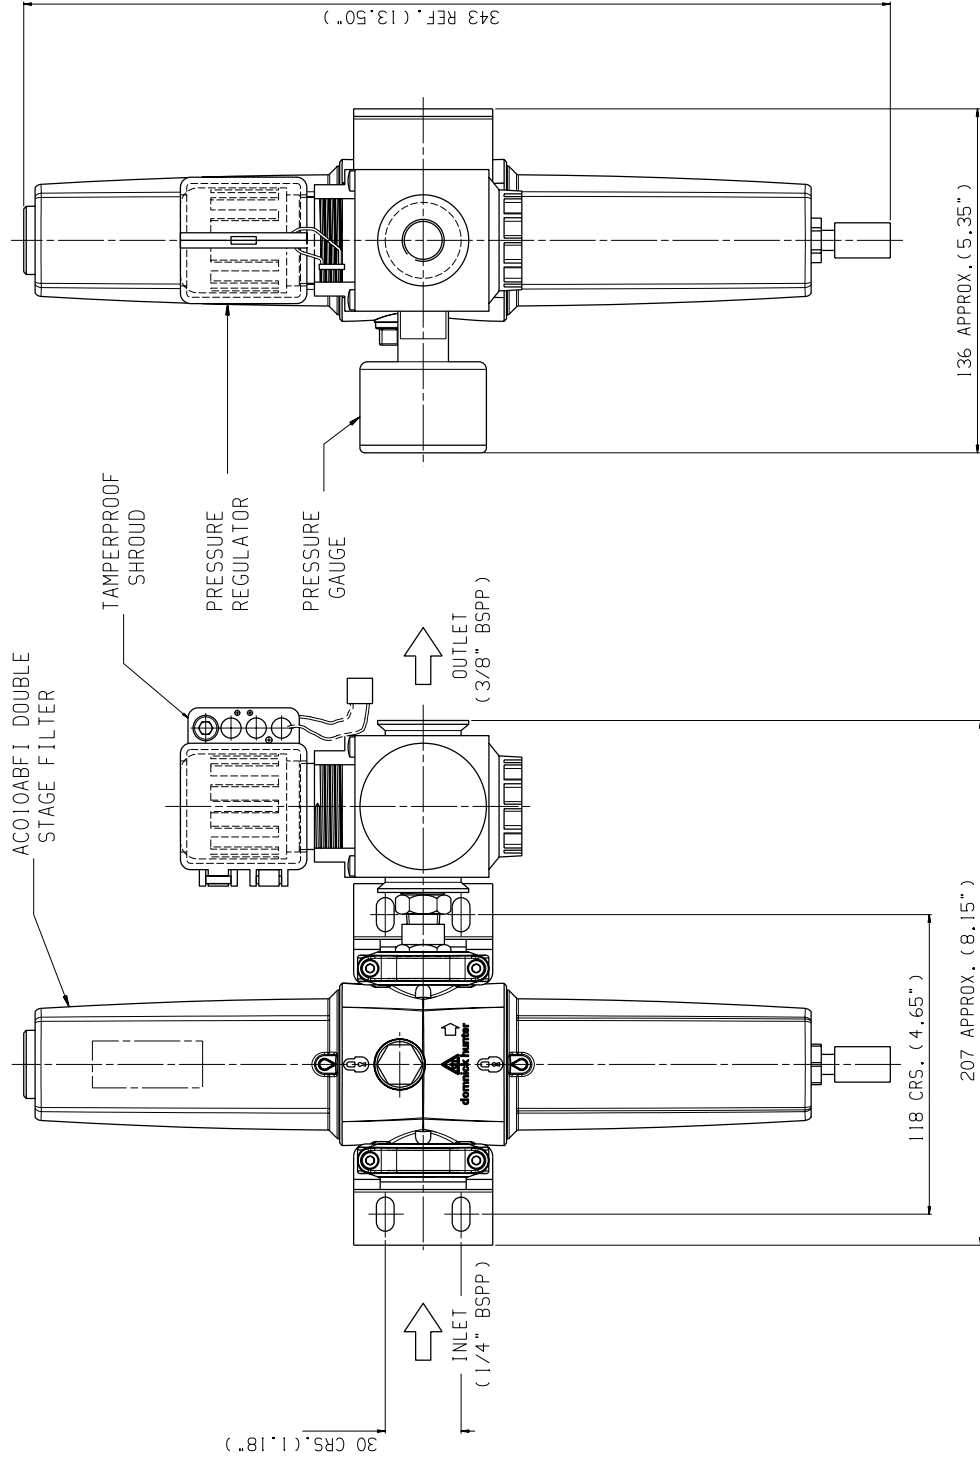

NOTE:-

ALL BAF-O10 PRODUCTS ARE SUPPLIED COMPLETE WITH AN O10AC-4 12 MONTHS SUPPORT PACK, CONSISTING OF 4 x O10AC CARTRIDGES.



SPECIFICATION:-

FLOW RATES 7 barg - INLET 0.4m³/min (13scfm) OUTLET 0.4m³/min (13scfm)
WEIGHT (APPROX.) 1.4kg. (3.09 lbs.).
Max. Operating Pressure 10 barg (145 psig).
Min. Operating Pressure 4 barg (58 psig).
Max. Recommended Operating Temperature 30°C (86°F).
Min. Recommended Operating Temperature 1.5°C (35°F).

UNIT TO BE PACKED IN BOX C/W USER GUIDE.

[illegible]