

PoleStar Smart

Refrigeration dryers

High Efficiency & Energy Saving



PoleStar Smart refrigeration dryers have been designed for the efficient removal of water from compressed air.

Equipped with the patented SmartSave energy-saving feature PoleStar Smart continually and precisely modulates its mode of operation to meet prevailing operating conditions, resulting in accurate dew-point monitoring with corresponding aligned power consumption.

Furthermore, indirect cost savings, reducing the “hidden costs” of pressure drop are maximised by the use of a patented “all-in-one” aluminium heat-exchanger-SmartPack. Here the provision of large open channels and no-interconnecting pipe-work enables the free, un-interrupted passage of air through the dryer, resulting in pressure drops second to none.



Contact Information:

Parker Hiross S.p.A.
Strada Zona Industriale 4
S. Angelo di Piove PD
Italy

Tel: +39 049 9712 217
Fax: +39 049 9701 911
Email: info@parker.com

www.dh-hiross.com

Product Features:

- Suitable for all compressed air applications
- Suitable for all compressor types, including variable flow
- The most energy efficient compressed air fridge dryer
- Low pressure drops for lower operational costs
- Cost of ownership reduced
- Significantly contributes to the indirect reduction of CO₂ into the environment

Philosophy

Parker Hiross specialises in cooling, purification, and separation technologies, where compressed air and gas purity, product quality, technological excellence and global support are paramount. We design and manufacture compressed air treatment products and cooling equipment for many key industries where ease of integration, low cost of ownership and energy saving can make the difference.


Parker Hiross has been supplying industry with high efficiency products with low lifetime costs and reduced CO₂ emissions since 1964. Our philosophy ‘to stand out from the crowd’ is our credo, encouraging our employees to achieve continuous improvement and satisfy customer expectations.



ENGINEERING YOUR SUCCESS.



PoleStar Smart

The **SmartPack** exchanger (patent-pending) is an extremely robust, all-in-one aluminium module with no connecting pipe-work. It offers one of the lowest pressure drop performances in it's class and in terms of energy saving acts as an internal "thermal-mass cold-store," utilising un-used refrigeration energy during periods of variable load.

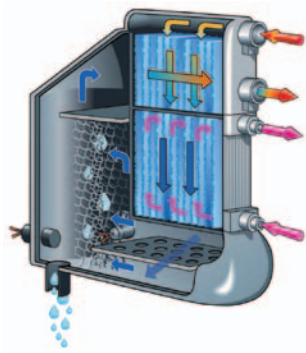

PoleStar Smart® features exclusively **compliant scroll compressors** (from PST120 upwards), offering energy savings of up to 20% compared to other systems.

Resistant to liquid refrigerant returns and with 50% less moving parts than similar technologies, these compressors are extremely reliable and very robust. Low vibration levels also serve to prolong the refrigeration circuit life.

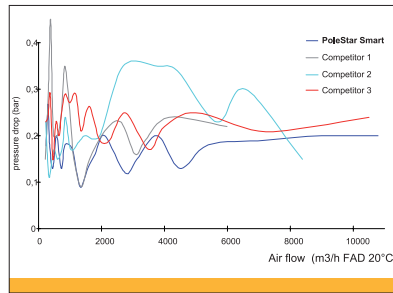

Maximum dew point performance is assured by:

- large air channels leading to low air flow velocity
- an oversized demister separator offering optimum condensate separation even at partial air flows



An additional standard feature on models from PST120 upwards is **SmartControl**.

This multi-functional display provides accurate digital dewpoint reading and visual indication of the coded alarm monitoring of the dryer.

SmartControl additionally manages the **SmartSave** feature (patent pending), informing the user when the dryer is operating in energy saving mode. A display indicates the average percentage savings on energy being achieved. Maintenance intervals are periodically displayed whilst the provision of a status report (indicating the last eight events) and hours-run meter simplify service.

Standard voltage-free contacts, MODBUS compatible supervisor (no gateway required) and an optional RS485 serial card connection allow remote monitoring of the dryer.

Low Pressure Drops

Every 140mbar of pressure drop adds approx. 1% to the cost of electrical power required by the compressor

- a dew point sensor positioned in the air flow to ensure optimum control.
- Thermal Shield Insulation (TSI) contributing to very low overall power consumption.

An integral zero-air loss drain **SmartDrainer** is fitted as standard to PST120 and upwards.

A large capacity condensate drainage chamber is an integral part of the heat exchanger. The zero-air-loss drain is synchronised to open automatically on sensing the level of condensate present in the drainage chamber. This valve closes again before any compressed air can escape. In the unlikely event of a fault during drain operation, self-diagnostic troubleshooting software signals an alarm and the drain continues to function thereafter in timed mode, returning to zero-air-loss operation when the fault has been rectified.



Technical data


Model	technical data			dimensions (mm)			weight (kg)	Pre filter	Post filter	
	air flow		abs. power	air	width	height				depth
	m ³ /h	m ³ /min	kW	conec.	A	B	C			
PST075	450	7,5	0,9	1 ½"	703	945	562	83	HFN122Q	HFN122P
PST095	570	9,5	1,38	1 ½"	703	945	562	83	HFN122Q	HFN122P
PST120	720	12	1,13	2"	706	1.064	1.046	145	HFN122Q	HFN122P
PST140	840	14	1,14	2"	706	1.064	1.046	145	HFN175Q	HFN175P
PST180	1.080	18	1,46	2"	706	1.064	1.046	155	HFN205Q	HFN205P
PST220	1.320	22	1,68	2 ½"	806	1.316	1.166	230	HFN300Q	HFN300P
PST260	1.560	26	2,19	2 ½"	806	1.316	1.166	240	HFN300Q	HFN300P
PST300	1.800	30	2,41	2 ½"	806	1.316	1.166	245	HFN370Q	HFN370P
PST350	2.100	35	3,06	2 ½"	806	1.316	1.166	250	HFN370Q	HFN370P
PST460	2.760	46	3,14	DN100	1.007	1.690	1.097	470	NFF610Q	NFF610P
PST520	3.120	52	3,54	DN100	1.007	1.723	1.097	490	NFF610Q	NFF610P
PST630	3.780	63	4,64	DN100	1.007	1.722	1.657	580	NFF750Q	NFF750P
PST750	4.500	75	5,73	DN150	1.007	1.722	1.657	670	NFF1000Q	NFF1000P
PST900	5.400	90	7,63	DN150	1.007	1.722	1.657	690	NFF1000Q	NFF1000P
PST1200	7.200	120	8,92	DN150	1.007	2.048	1.657	830	NFF1510Q	NFF1510P
PST1500	9.000	150	12,35	DN200	1.007	2.208	2.257	1.100	NFF1510Q	NFF1510P
PST1800	10.800	180	15,96	DN200	1.007	2.208	2.257	1.190	NFF2000Q	NFF2000P

Performances refer to air-cooled models with air suction of FAD 20°C/1 bar A, and the following operating conditions: air suction 25°C/60% RH, 7 barg working pressure, pressure dew point in accordance with DIN ISO 8573-1, 25°C cooling air temperature, 35°C compressed air inlet temperature. All indicated data refers to DIN ISO 7183. All models supplied with refrigerant R407C and for operation up to 14 barg. 50Hz models PST075-095 supplied with 230V/1ph/50Hz power supply, models PST120-1800 with 400V/3ph/50Hz. Water-cooled versions available from model 220. PST075-350 models with BSPP-F connections. The 60Hz version of the PoleStar Smart® models are available from 7m³/min air flow.

Air flow correction factors for differing working conditions

A) Working pressure correction factors	barg	3	4	5	6	7	8	9	10	11	12	13	14
		0,74	0,83	0,9	0,96	1	1,04	1,07	1,08	1,11	1,12	1,14	1,15
B) Air inlet temperature correction factors	°C	30	35	40	45	50	55	60	65				
		1,23	1	0,84	0,7	0,59	0,5	0,45	0,4				
C) Ambient temperature correction factors	°C	20	25	30	35	40	45	50					
		1,06	1	0,95	0,9	0,83	0,77	0,72					

To obtain the actual air flow multiply the nominal air flow by the above correction factors (ie. Air flow x A x B x C). PoleStar Smart® can operate up to an ambient temperature of 50°C and inlet temperature of 65°C. The above correction factors are approximate: for a precise selection always refer to the software selection program or contact your Parker Hiross partner.

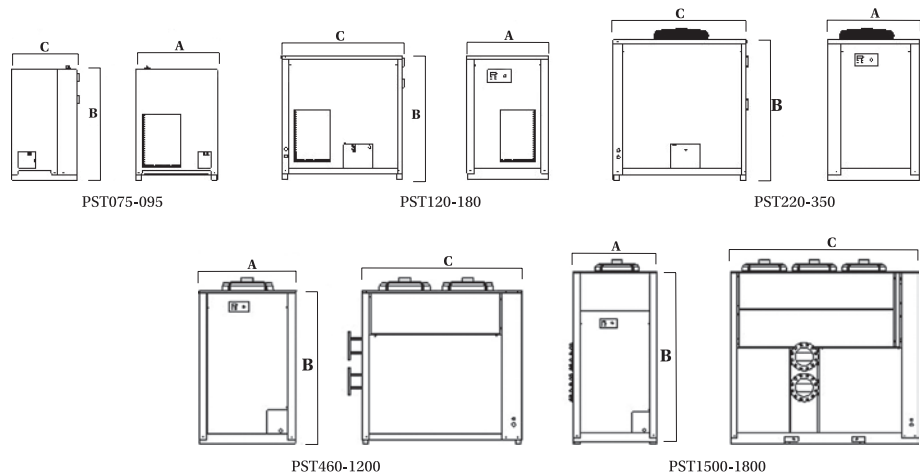

Parker Worldwide

AE – UAE, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe,
Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 87 00
parker.switzerland@parker.com

CL – Chile, Santiago
Tel: +56 2 623 1216

CN – China, Shanghai
Tel: +86 21 5031 2525

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 33 00 01
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK – Hong Kong
Tel: +852 2428 8008

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN – India, Mumbai
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP – Japan, Tokyo
Tel: +(81) 3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

LV – Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NL – The Netherlands,
Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG – Singapore
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH – Thailand, Bangkok
Tel: +662 717 8140

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom,
Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US – USA, Cleveland
Tel: +1 216 896 3000

VE – Venezuela, Caracas
Tel: +58 212 238 5422

ZA – South Africa,
Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, ES, FI, FR, IE,
IT, NL, NO, PL, PT, RU, SE, UK, ZA)

BULPST-00-EN