


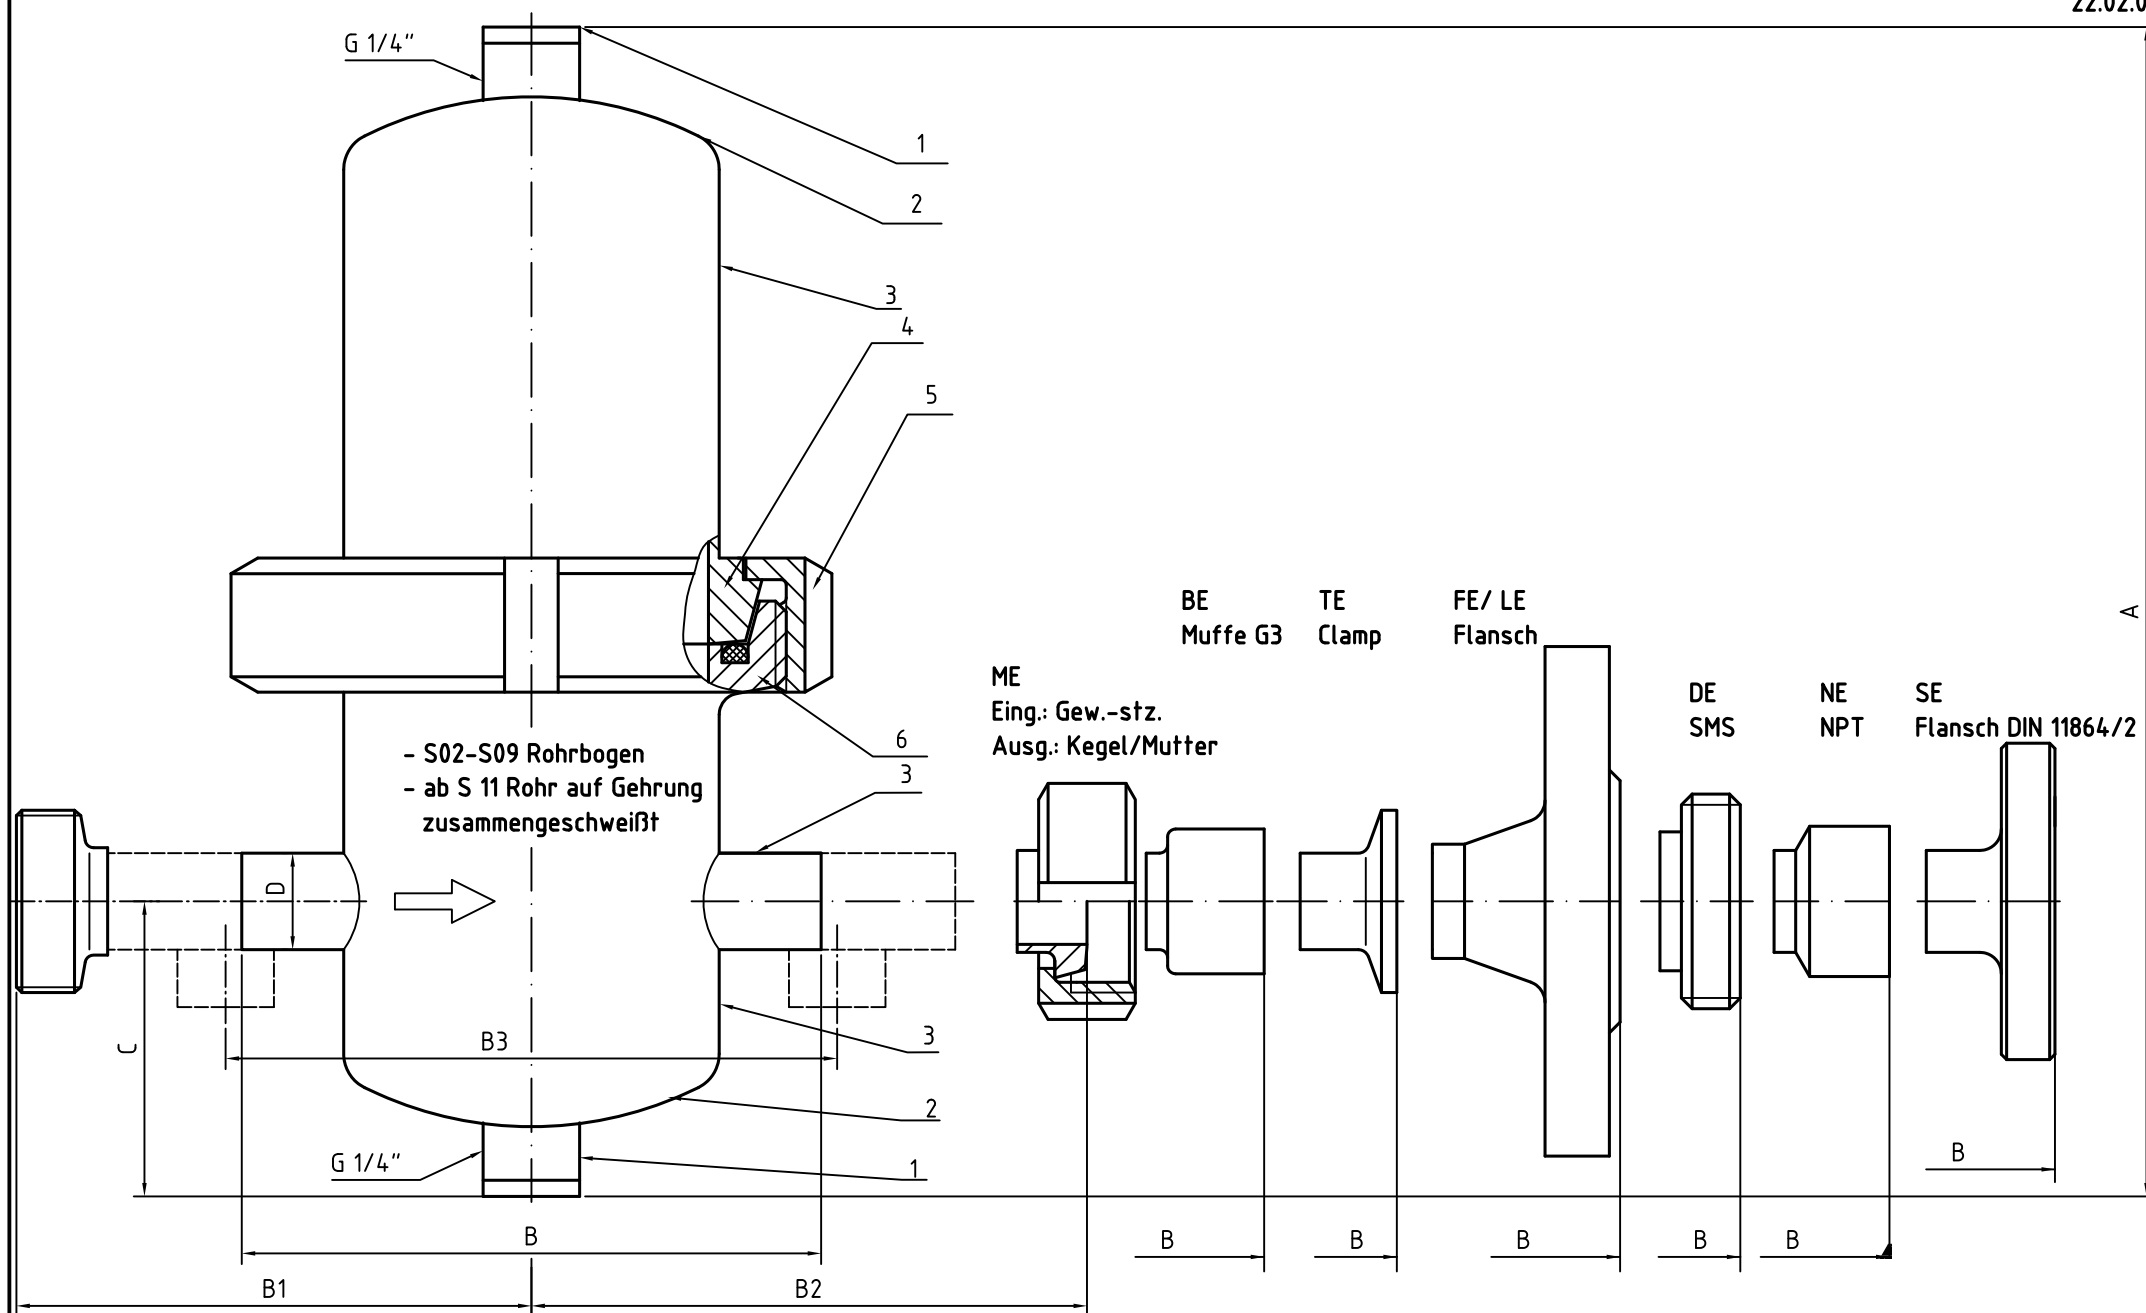

Techn. Daten

Baureihe HIGH FLOW

DN	Typ	A	*A DIN11850 Schweißende	*I DIN ISO	*M Gew.-stz. k DIN 11851	Kegel/ Mutter	*B G3 Muffe DIN 2999	*T Klemmstz. DIN 32676	*F Flansch PN 16 DIN 2633	*L Ansi Flansch 150 lb.	*D Gew.-stz. SMS	*N NPT-Muffe	*S Flansch 11864/2				Filter- element
			B	B1	B2	B	B	B	B	B	B	B	B	C	D/ RohrØ	Gehäuse	
10	VBA-2B-*E	220	108	71	67	147	143	177				146	155	55	13x1.5	70 x 2	2,5"
10	VBA-5B-*E	220	108	71	67	147	143	177				146	155	55	13x1.5	70 x 2	2,5"
15	VBA-7B-*E	220	108	71	67	151	143	177	204			150	155	55	19x1.5	70 x 2	2,5"
20	VBA-9B-*E	220	108	73	67	151	143	183	213			160	155	55	23x1.5	70 x 2	2,5"
25	VBA-11A-*E	312	135	89	82	188	177	210	247	164	187	182	155	75	29x1.5	85 x 2	5"
32	VBA-12A-*E	312	135	89	82	198	177	214	250	164	197	182	155	75	35x1.5	85 x 2	5"
40	VBA-13A-*E	312	135	89	82	198	177	218	259	174	197	182	155	75	41x1.5	85 x 2	5"
40	VBA-131-*E	486	170	124	117	233	212	253	294	209	232	217	155	75	41x1.5	104 x 2	10"
50	VBA-141-*E	486	170	108	101	233	212	259	297	209	232	217	155	80	53x1.5	104 x 2	10"
50	VBA-142-*E	792	170	108	101	233	212	259	297	209	232	217	155	80	53x1.5	104 x 2	20"
65	VBA-182-*E	822	200	125	117	275	255	289	340	247	274	247	155	110	70x2	129 x 2	20"
80	VBA-193-*E	1086	200	125	117	289	255	299	340	247	288	251	155	110	85x2	129 x 2	30"

DN	Typ	Gehäuse	*A DIN11850 Schweißende	*I DIN ISO	*M Gew.-stz. k DIN 11851	Kegel/ Mutter	*B G3 Muffe DIN 2999	*T Klemmstz. DIN 32676	*F Flansch PN 16 DIN 2633	*L Ansi Flansch 150lb.	*D Gew.-stz. SMS	*N NPT-Muffe	*S Flansch 11864/2
			Anschluß /D										
10	VBA-2B-*E	70 x 2	13x1.5	17.2x1.6	10/13	¼" /13	10/13	10/17.2				¼" /13	10/13
10	VBA-5B-*E	70 x 2	13x1.5	17.2x1.6	10/13	⅜" /13	10/13	10/17.2				⅜" /13	10/13
15	VBA-7B-*E	70 x 2	19x1.5	21.3x1.6	15/19	½" /19	15/19	15/21.3	½" /21.3			½" /19	15/19
20	VBA-9B-*E	70 x 2	23x1.5	26.9x1.6	20/23	¾" /23	20/23	20/26.9	¾" /26.7			¾" /23	20/23
25	VBA-11A-*E	85 x 2	29x1.5	33.7x2	25/29	1" /29	25/29	25/33.7	1" /33.4	25		1" /29	25/29
32	VBA-12A-*E	85 x 2	35x1.5	42.4x2	32/35	1¼" /35	32/35	32/42.4	1¼" /42.2	32		1 ¼" /35	32/35
40	VBA-13A-*E	85 x 2	41x1.5	48.3x2	40/41	1½" /41	40/41	40/48.3	1½" /48.3	38		1 ½" /41	40/41
40	VBA-131-*E	104 x 2	41x1.5	48.3x2	40/41	1½" /41	40/41	40/48.3	1½" /48.3	38		1 ½" /41	40/41
50	VBA-141-*E	104 x 2	53x1.5	60.3x2	50/53	2" /53	50/53	50/60.3	2" /60.3	51		2" /53	50/53
50	VBA-142-*E	104 x 2	53x1.5	60.3x2	50/53	2" /53	50/53	50/60.3	2" /60.3	51		2" /53	50/53
65	VBA-182-*E	129 x 2	70x2	76.1x2.3	65/70	2½" /70	65/70	65/76.1	2½" /73	63.5		2 ½" /70	65/70
80	VBA-193-*E	129 x 2	85x2	88.9x2.3	80/85	3" /85	80/85	80/88.9	3" /88.9	76		3" /85	80/85

- bei Ausführung mit
Differenzdruckmanometer
ändert sich das Maß "B"
um 2x +25mm